

螺旋钢丝绳减震缓冲器

FH10016

RoHS对应品


● 产品在没有预告的前提下有可能会进行变更。




规格

型式	H mm	OD mm	重量 g	最大弯曲度 mm		
				压缩	剪切旋转	45° 压缩旋转
FH10016-1	23.3	33.5	51	6.3	10.2	9.5
FH10016-2	27.1	37.4	52	10.1	15.2	14.3
FH10016-3	29.3	39.8	53	12.3	17.8	17.4
FH10016-4	34.0	45.4	55	16.6	22.9	23.5


A type (安装部为螺丝)

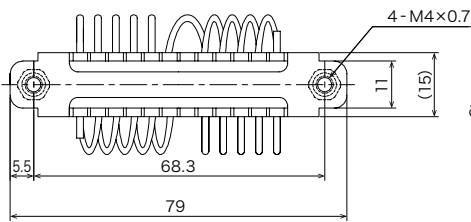


D type (安装部位通孔)

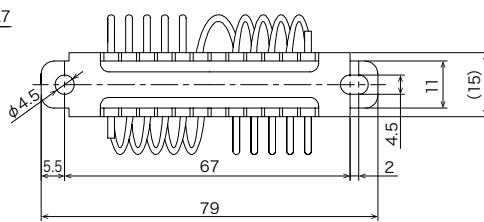




压入螺母 (仅限形状A)



設置方法



振动选定表

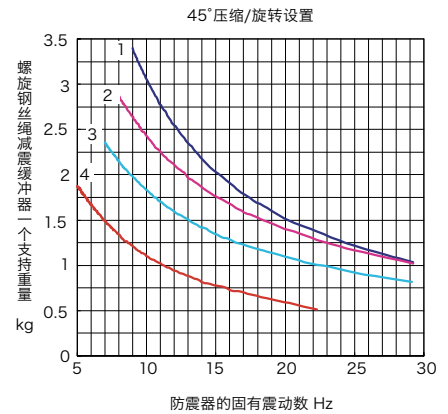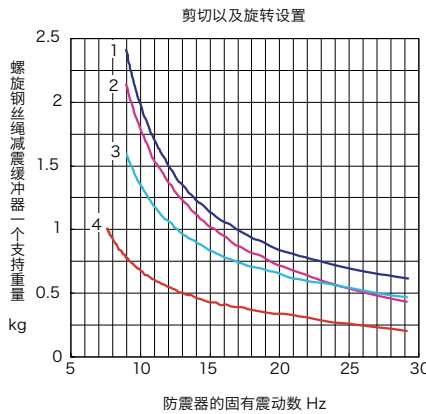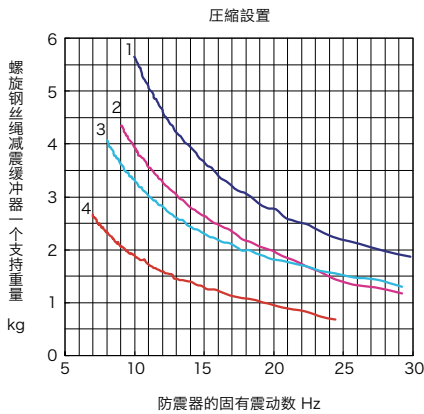

冲击特性选定表

