

螺旋鋼絲繩減震緩衝器

FH10040

RoHS対応品

●產品在無預告的前提下有可能會進行變更。






規格





型式	H mm	OD mm	重量 g	最大彎曲度 mm		
				壓縮	剪切旋轉	45° 壓縮旋轉
FH10040-1	33.5	50.6	223	8.2	12.7	11.6
FH10040-2	35.6	52.2	232	10.4	15.2	14.7
FH10040-3	40.9	58.4	235	15.4	20.3	21.8
FH10040-4	45.7	64.6	249	20.2	27.9	28.6

A type (安裝部為螺絲)

D type (安裝部位通孔)

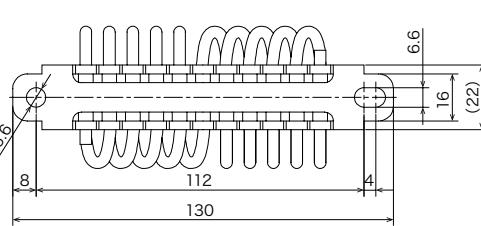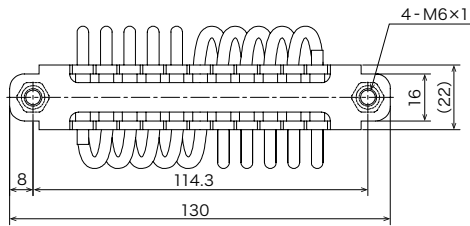


設置方法




振動選定表


壓縮設置

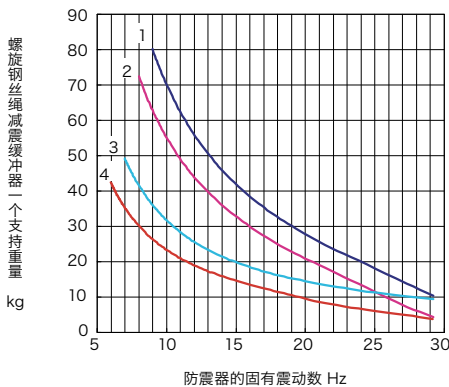

剪切以及旋轉設置

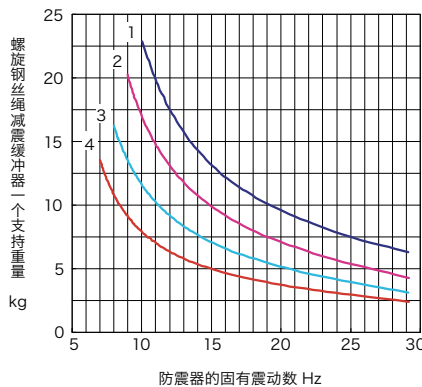


45° 壓縮/旋轉設置

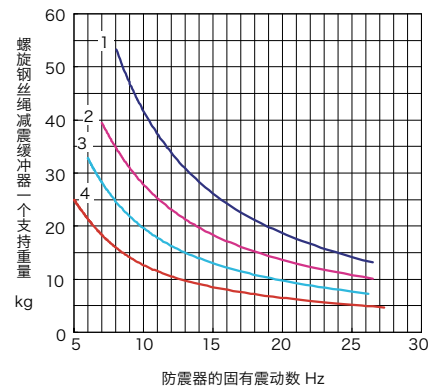


衝擊特性選定表

壓縮設置

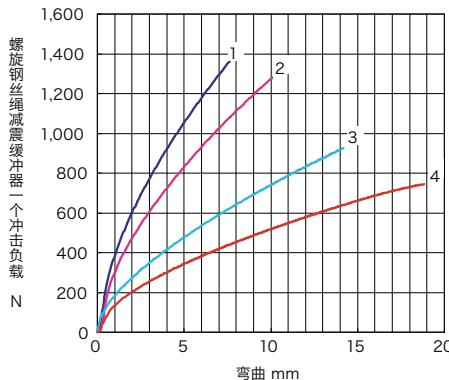

剪切以及旋轉設置

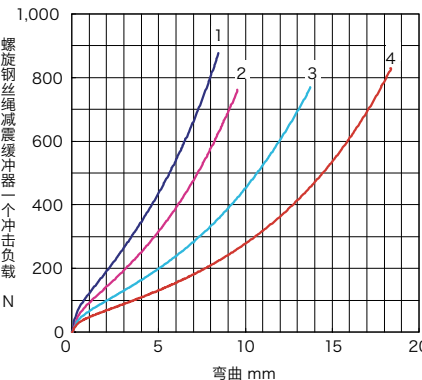

45° 壓縮/旋轉設置

