

螺旋钢丝绳减震缓冲器

FH10048

RoHS対応品


●产品在无预告的前提下有可能会进行变更。





规格

型式	H mm	OD mm	重量 g	最大弯曲度 mm		
				压缩	剪切旋转	45° 压缩旋转
FH10048-1	33.5	46.1	256	6.2	10.2	8.8
FH10048-2	37.8	51.4	280	10.9	12.7	15.4
FH10048-3	42.0	57.4	286	15.0	12.7	21.2


A type (安装部为螺丝)

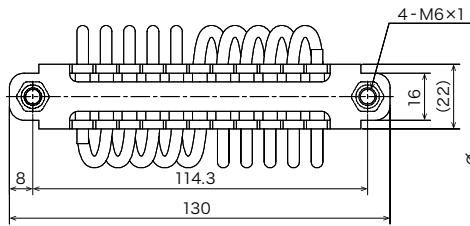




D type (安装部位通孔)

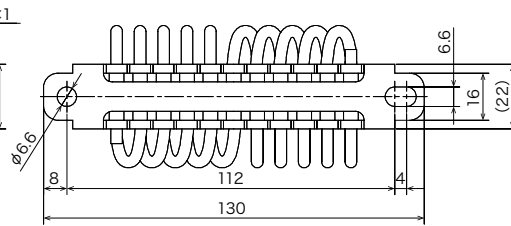

設置方法



振动选定表

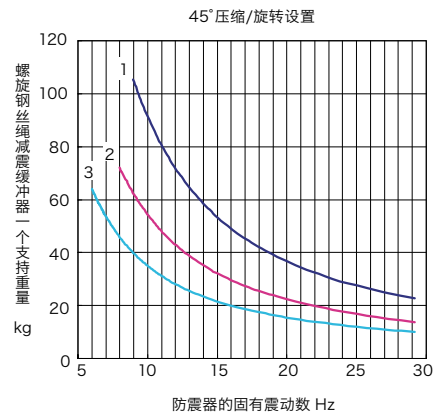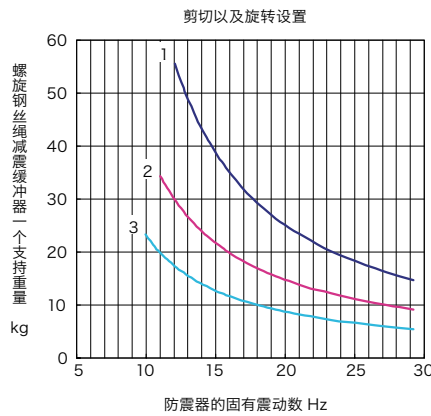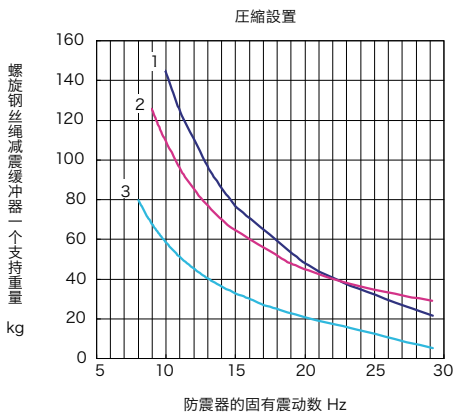

冲击特性选定表

